



CENTRAL UNIT

1 door

GOOD TO KNOW

With the relay card, control up to 3 additional relays. 12-0110 (page 64)




03-0102: **One door central unit** for 200 users managed in real-time.

- Easy to install
- Manage up to 3,000 key fobs
- Self-diagnostics



Remote online management
www.intratone.info

SIMPLIFIED SCHEMATIC

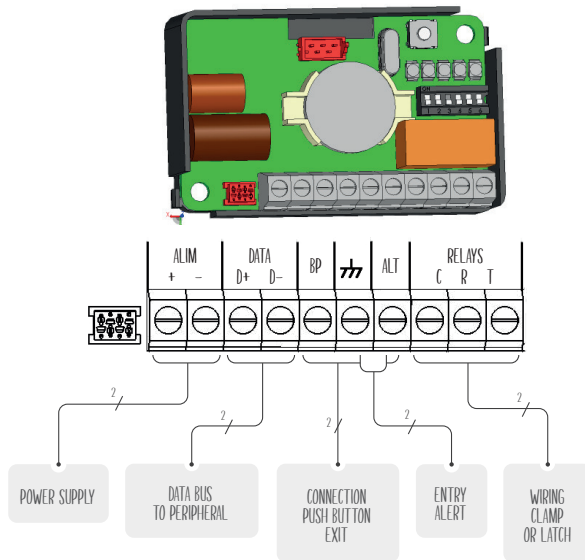

Max number of accesses managed

Max number of accesses managed	1 door
Extension card option	No
Max number of intercom handsets per module	1
Number of relays	1
Number of additional relays (12-0110)	3

Management

In real-time and remotely (www.intratone.info)	Yes
Max number of names displayed	200
Max number of key fobs / transmitters	3,000
Max number of keypad codes	40
Max number of telephone codes	10

Functions

Open access time slots	Yes
Annual clock	Yes
Log events	Yes
Self-diagnostics	Yes
Alerts	1 (+3 with 12-0110)

TECHNICAL SPECIFICATIONS

Power supply

Management unit only
24 V DC-2.5 A/12 3A DC

Wiring

Central unit - intercom system
4 wires (2 twisted pairs)
Ø 8/10e - Max: 100m

Central unit - module
4 wires (2 twisted pair)
Ø 8/10e - Max: 100m

Central unit - reader or intercom or coded keypad
4 wires (2 twisted pairs)
Ø 8/10e
Max distance: 100m

Dimensions (L x H x D)

74 x 59 x 18mm

Environment

Central unit operating temperature
-10°C to +45°C
Protection index
IP40