




02-0206-EN



DD-02 VIDEO INTERCOM



# AUDIO CALL



3G Module





4G IP Module










# VIDEO CALL




3G Module 

4G IP Module 

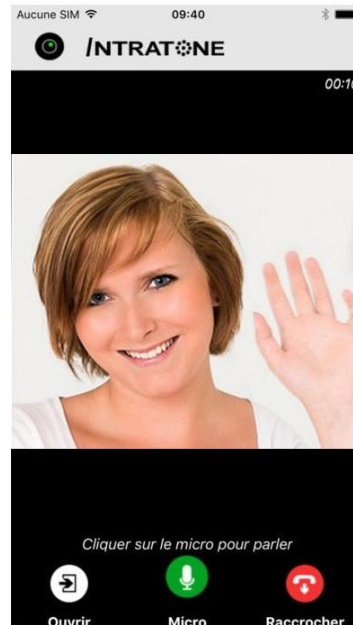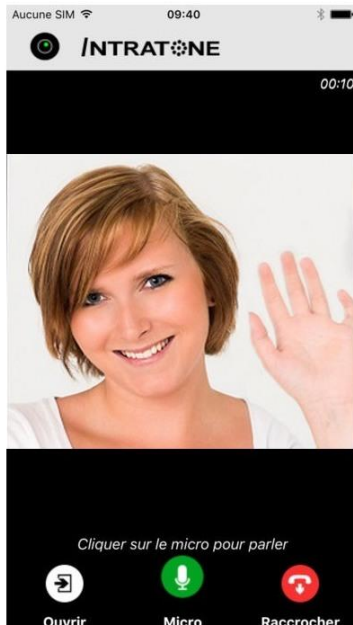


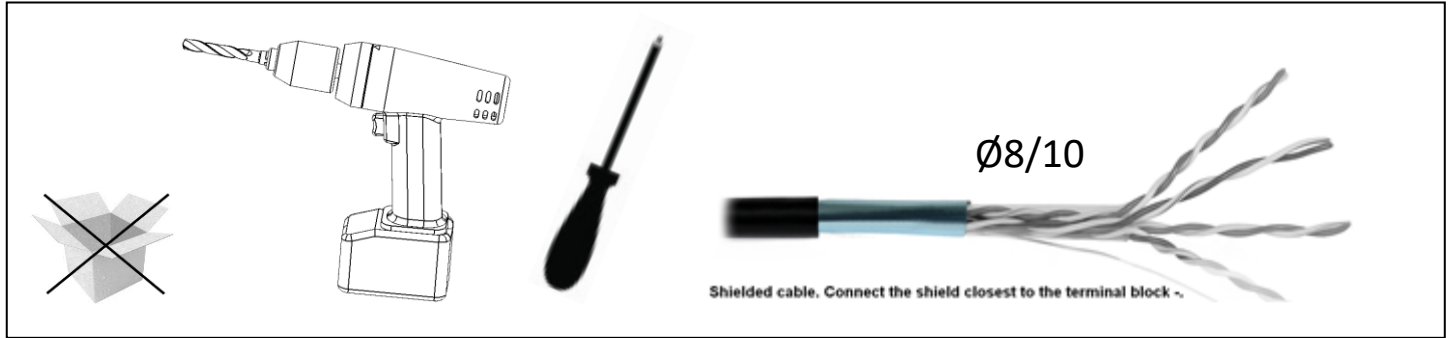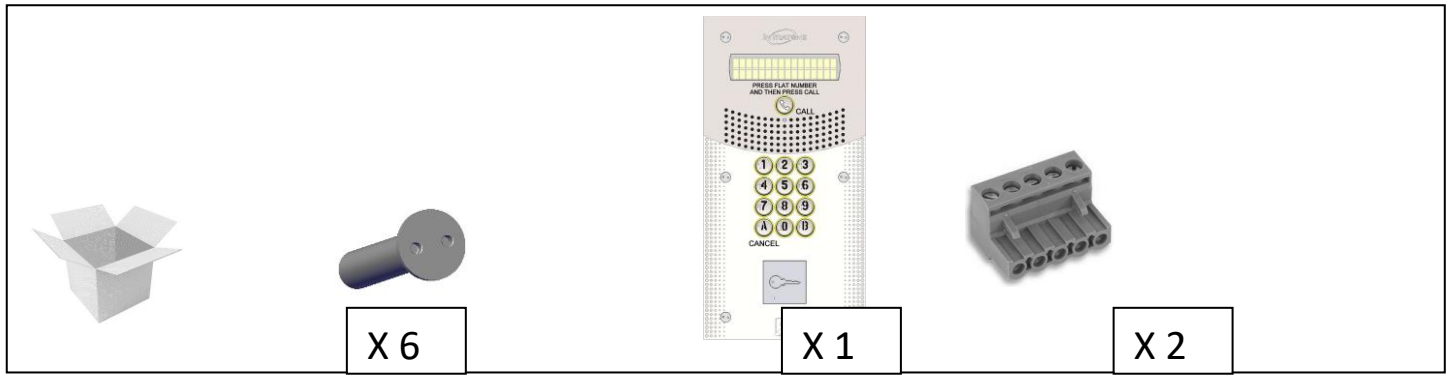


### Proximity reader

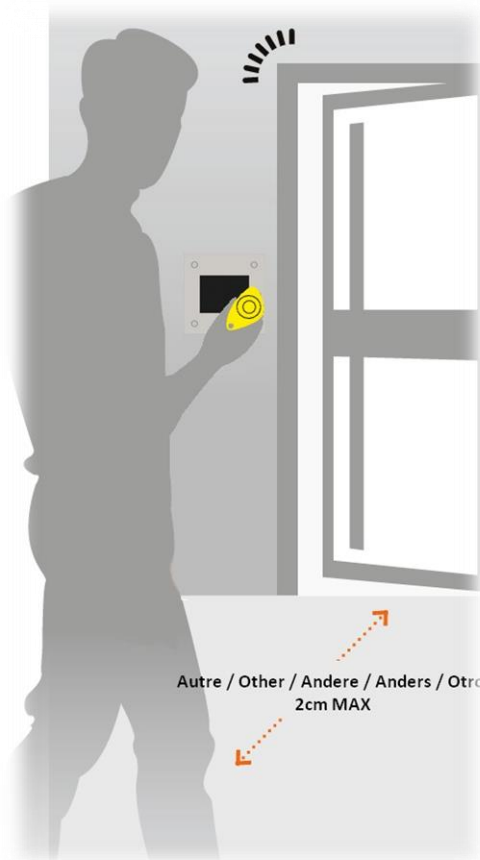

# DIMENSIONS

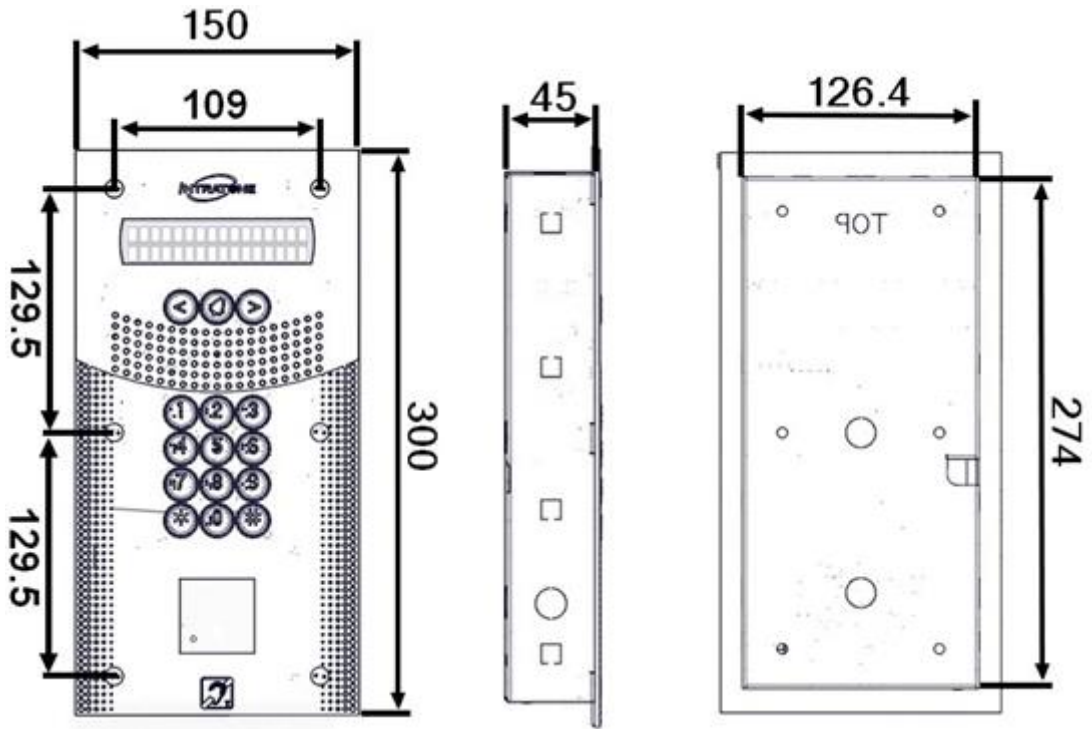

The intercom has a hinge that facilitates interventions, it is removable.



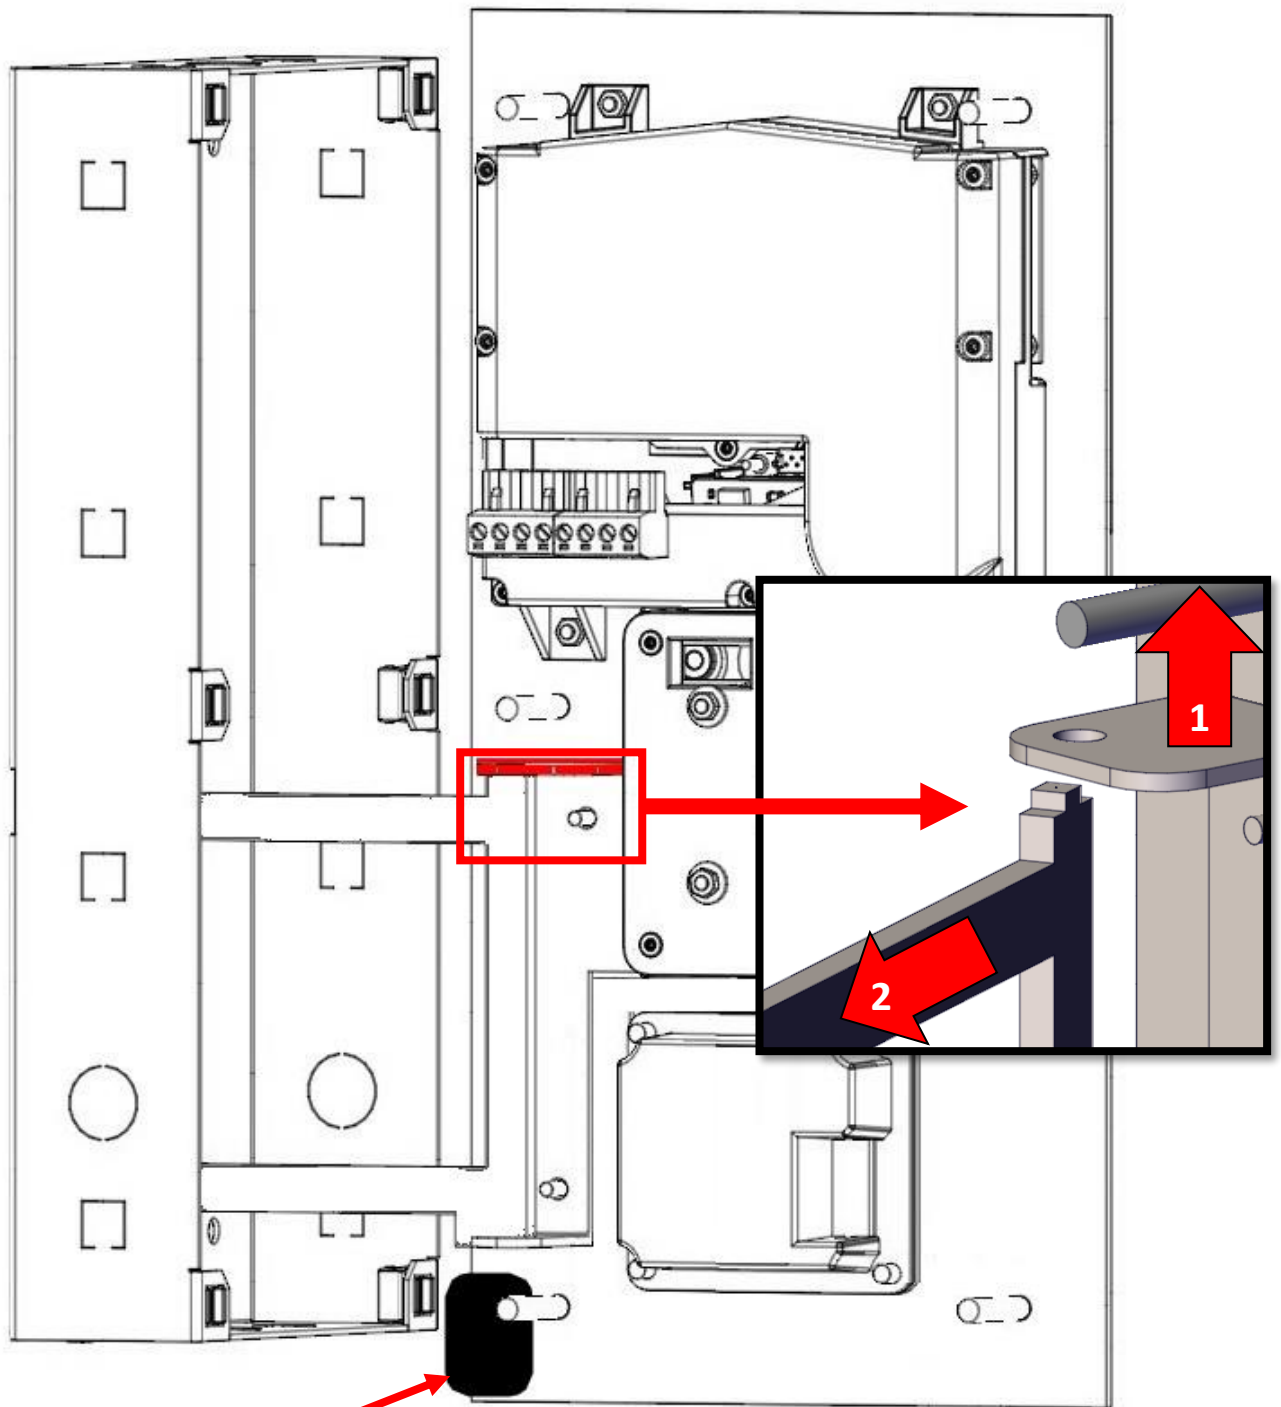


Shim to remove before closing the intercom.

03-0102





17-0263

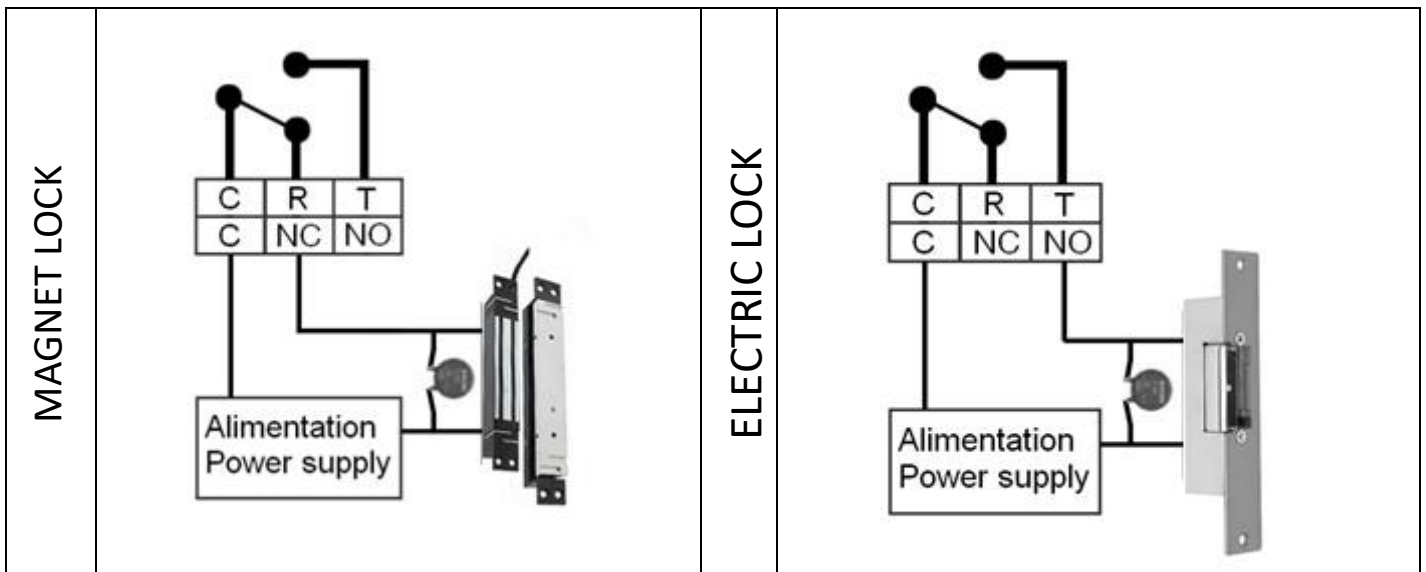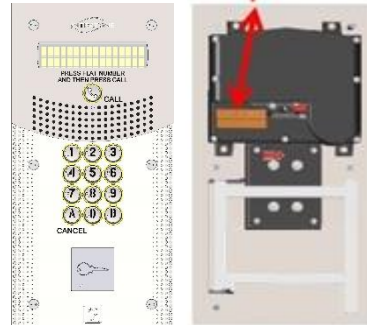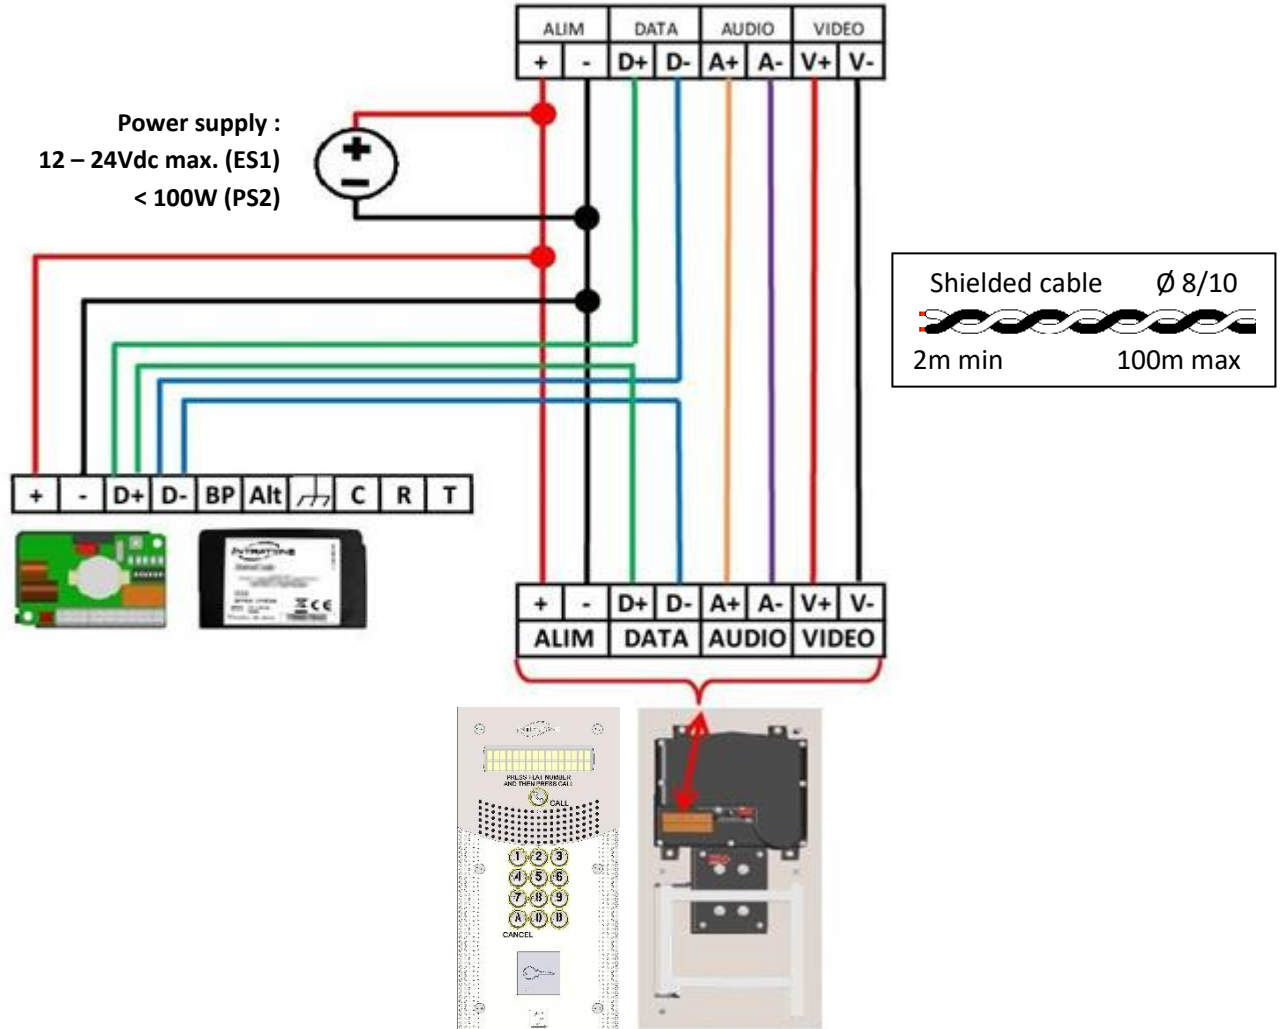




# 03-0101

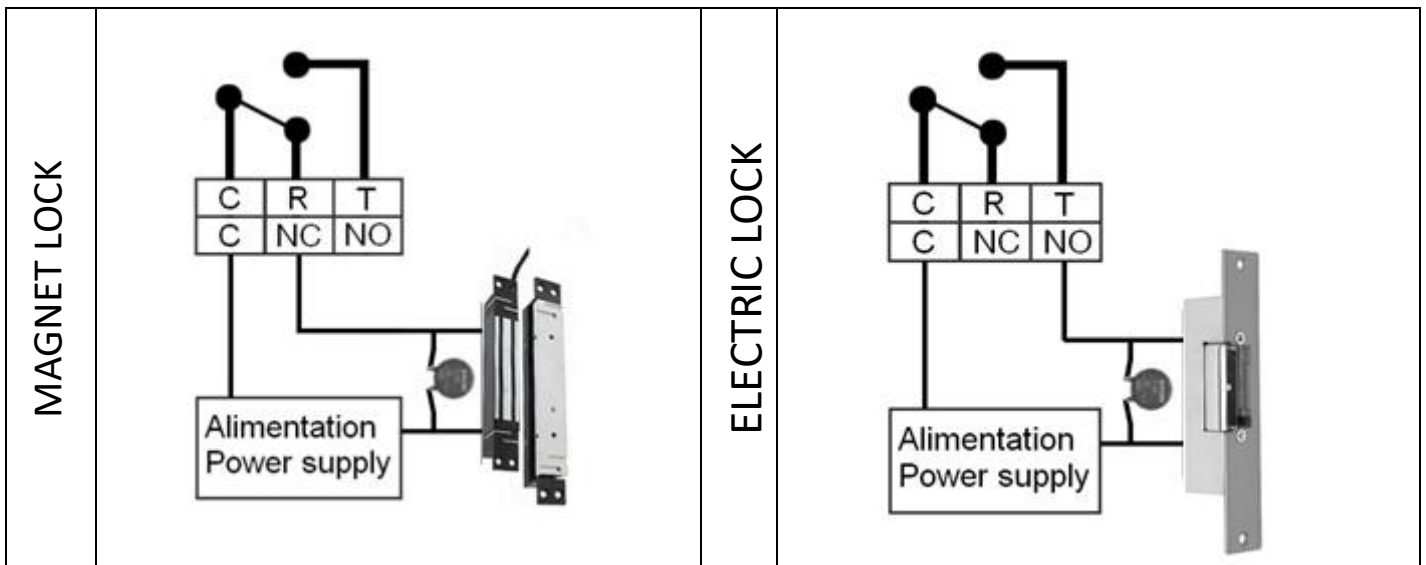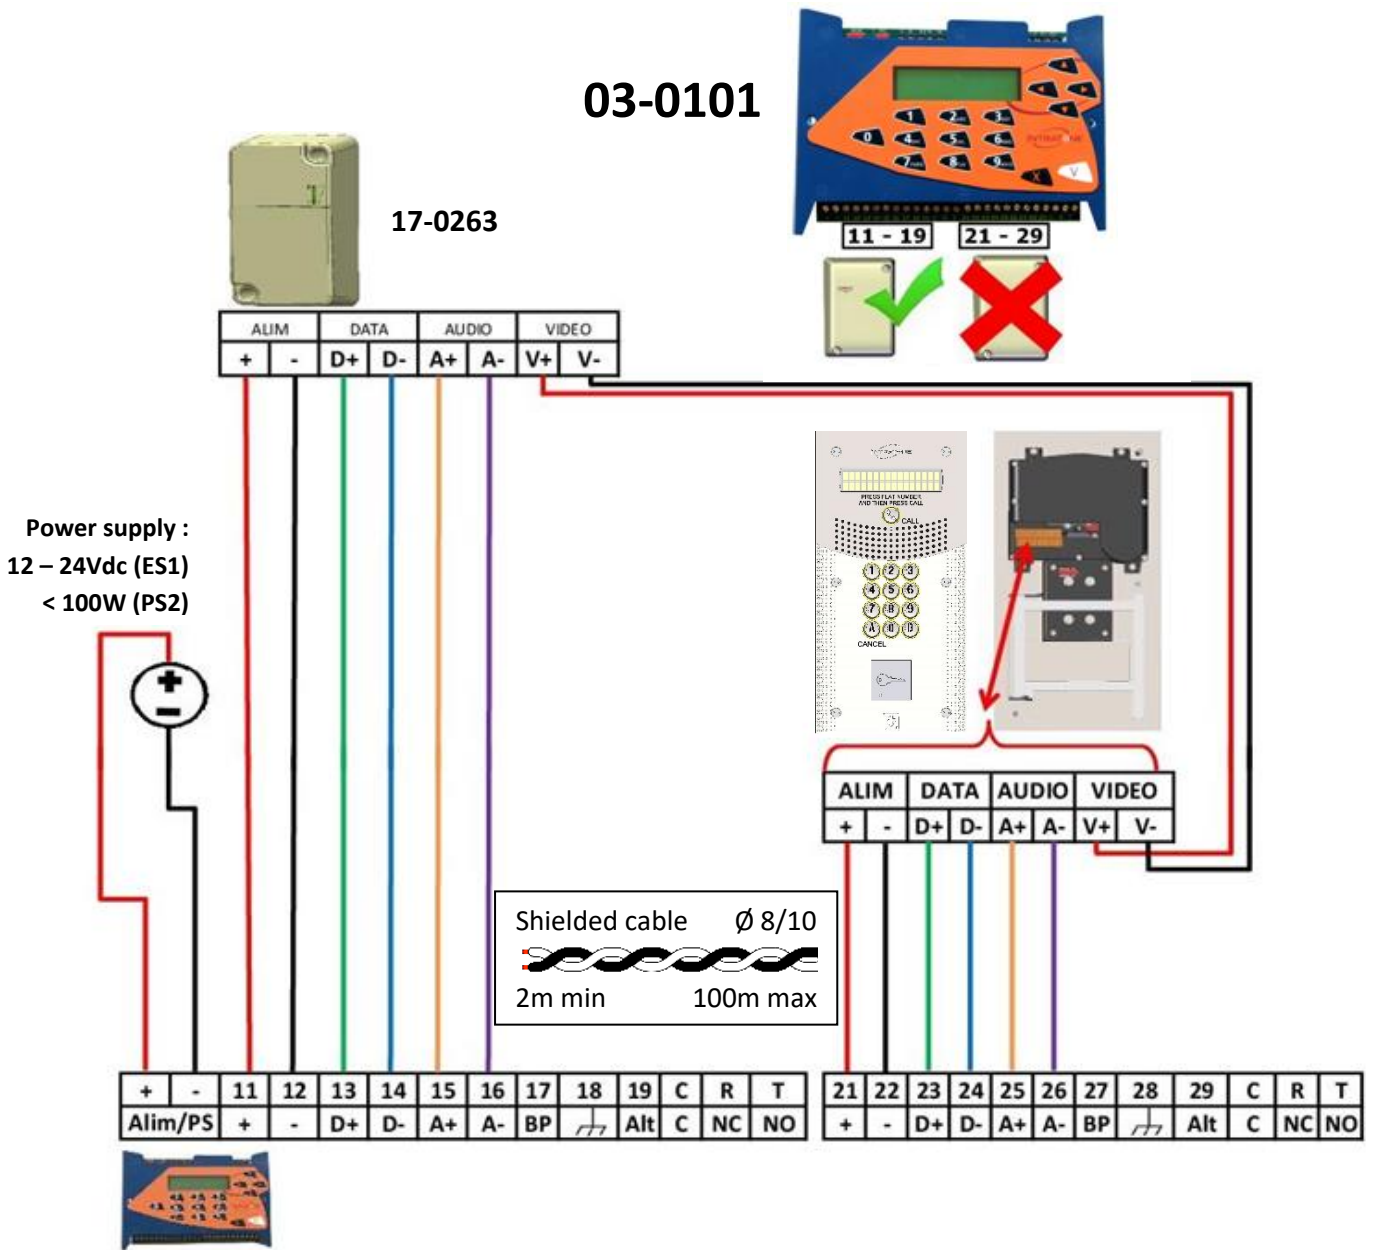




1

Go to the welcome screen and create a residence. Select the mode of residence desired (simplified or full.)




Select the operating mode of your residence:



2

Click on, « Create. » Select your intercom and name it.




3

Click on, « Central unit settings. » Create a new central unit and select the type of central unit used. Fill in the blanks. Input the serial number of the central unit. Contract number corresponds to the serial number of the 4G module.



4

Go back to the residence. Click on the create button. You have to create an apartment or a list of apartments depending on your needs.



Apartment



List of apartments

5

Once in the apartment, you will be able to create a record or a fob. You can update the residence by going back on the welcome screen once you have programmed all your records and fobs.



Technical specifications :		
Operating voltage	12 – 24Vdc max. (ES1) < 100W (PS2)	
Radio frequency characteristics	100 Hz - 9kHz	< 120 dBμA/m @10m
	13.553 MHz - 13.567 MHz	-16.51 dBμA/m @10m
Storage Temperatures range	-20 to +60°C	
Operating Temperatures range	-20 to +60°C	
Operating environment	IP54	



**Warranty operating guarantees:**

The DD-02 video intercom is guaranteed within a temperature range of -20°C and +60°C and at a relative humidity level not exceeding 70%.

It must be installed according to the Top/Bottom directions given in these instructions and on the device.

The installation must be carried out by qualified personnel with the necessary knowledge for a safe assembly of the equipment.

This kit includes the necessary elements to ensure a safe installation of the equipment.

The equipment must be installed in an area where access is limited (technical room, height ...) to qualified personnel.

Finland, Norway, Sweden : Do not install outside because of extreme temperature



**End-of-life recycling of the product:**

The DD-02 video intercom and its accessories must not be discarded with unsorted municipal waste, but must be disposed of via the WEEE (Waste Electrical and Electronic Equipment) collection and recycling system.



**Simplified declaration of conformity**

The undersigned, COGELEC, declares that access control type radio equipment for collective housing is in compliance with the Radio Equipment Regulations 2017. The full text of the declaration of conformity is available at the following internet address: <http://certificates.intratone.com/>



**Simplified declaration of conformity**

The undersigned, COGELEC, declares that access control type radio equipment for collective housing is in compliance with Directive 2014/53/EU (RED). The full text of the EU declaration of conformity is available at the following internet address: <http://certificates.intratone.com/>