




CENTRAL UNIT

2 door



GOOD TO KNOW

With the extension card, go from 2 to 4 doors. 12-0109 (page 64)

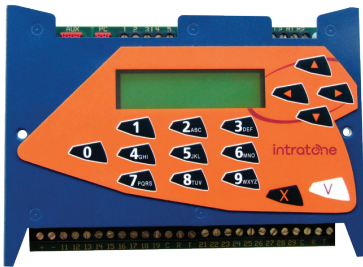


03-0101: **Two door central unit** for 1,000 users managed in real-time.

- Control 1 to 4 doors, with up to 1,000 homes
- Manage up to 7,000 fobs and / or transmitters
- Self-diagnostics



Remote online management
www.intratone.info

SIMPLIFIED SCHEMATIC

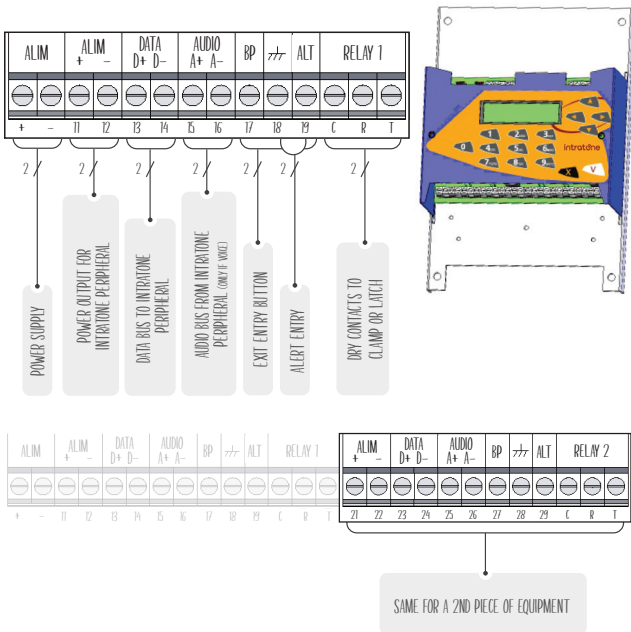

Max number of accesses managed	2 doors
Extension card option (12-0109)	2 additional doors
Max number of intercoms per central unit	3*
Number of relays	2 (+2 with 12-0109)
Management	
Max number of names displayed	1,000
Max number of key fobs / transmitters	7,000
Max number of keypad codes	40
Max number of telephone codes	10
Functions	
Open access time slots	Yes
Annual clock	Yes
Log events	Yes
Self-diagnostics	Yes
Alerts	2 (+ 2 with 12-0109)

*1 video-enabled, 2 audio only.

EASIER TO USE

TECHNICAL SPECIFICATIONS

Power supply

Management unit
24 V DC-2.5 A/12.3 A DC

Wiring

Central unit - intercom system
6 wires (3 twisted pairs)
Ø 8/10e - Max: 100m

Central unit - reader or HF receiver or coded keypad
4 wires (2 twisted pairs)
Ø 8/10e
Max distance: 100m

Dimensions (L x H x D)

155 x 110 x 55mm

Environment

Central unit operating temperature
-10°C to +45°C
Protection index
IP40