



# COMMUNICATING

Key safe

EASIER TO USE

INTRABOX



Electronic key ring tag

10 YEARS  
UNLIMITED UPDATES

## INTRABOX Data communicating key safe + 1 proximity reader (04-0104)- flush fit, stainless steel.

- Control who has access to site keys - and when
- Allow access with authorised key fobs
- Stainless steel finish




Accessible for all



Remote online management  
www.intratone.info  
or organigramme.info

## SIMPLIFIED SCHEMATIC

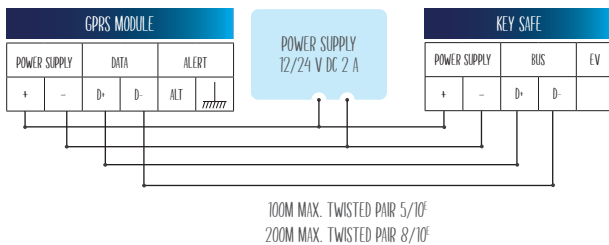

### Capacities

Compatible with key fobs and transmitters equipped with MIFARE technology	Yes
Max number of key fobs	3,000
Technical alert (emails)	Yes
Yearly time switch	Yes

### Management and alerts

Alert if door is open too long	Yes
Alert / intrusion (strikes to box)	Yes
List of events on the management website	Yes
Alert / key ring tag X removed	Yes
Alert / key ring tag X returned	Yes
Management of mechanical keys and electronic keys (organigramme.info)	Yes

## TECHNICAL SPECIFICATIONS

### Power supply

Key safe  
12/24 V DC 2 A mini

### Wiring

Key safe - GPRS module or central unit  
2 wires (1 twisted pairs)  
Ø 8/10e - Max: 100m

### Dimensions (L x H x D)

GPRS module  
162 x 96 x 53mm  
Key safe back box  
126 x 179 x 60mm  
Key safe facade  
150 x 220 x 2.5mm

### Environment

Operating temperature  
-20°C to +70°C  
Key safe protection index  
IP55

## RANGE

### Products

06-0106 | Intrabox communicating key box: 1 key box (02-0116) + 1 proximity reader (04-0104) + 1 transmissions module with 10-year unlimited data synchronisation - stainless steel finish

### Accessory

12-0102 | Surface mounted box - stainless steel finish (155.5 x 225.5 x 71mm)