



DD-01

VIDEO INTERCOM

- + Flush-mounted installation, surface-mounted box option
- + Trade button
- + Pinhole camera
- + Proximity reader
- + 12 keys backlit coded keypad



DD-01 stainless steel finish 02-0200



www.intratone.info

DD-01 VIDEO INTERCOM RANGE

		1 INTERCOM	1 INTERCOM + 1-DOOR CENTRAL UNIT // 200 NAMES	1 INTERCOM + 2-DOORS CENTRAL UNIT // 1,000 NAMES
DD-01	Stainless steel finish	02-0200	02-0201	02-0202

ACCESSORIES

	DD-01 Surface-mounted box	Stainless steel finish	12-0131	W 185.5 x H 390.5 x D 71 mm
--	---------------------------	------------------------	---------	-----------------------------

INTERCOM

DIMENSIONS (W x H x D)	DD-01 intercom	180 x 385 x 2.5 mm
	DD-01 Flush-mounted tank	156.2 x 359 x 60 mm
ENVIRONMENT	Operating temperature	-20°C to +60°C
	Index Protection	IP54 / IK08
ACCESS CONTROL EQUIPMENT	Coded keypad	✓
	Square proximity reader	✓
	Outdoor / Indoor	✓
INSTALLATION	Flush-mounted	✓
	Surface-mounted	Surface-mounted box available as an add-on product
ADDITIONAL INFORMATION	Accessibility Needs compliant	✓
	Hearing loop	✓
	Yellow highlighted buttons	✓
	Time taken to connect	40 sec.
	Configurable welcome message (64 scrolling or static characters)	✓
	Name or flat number displayed on time slots	✓
	Display: 2 lines of 16 characters each	✓
	Functional messages: (call in progress, etc.) Voice synthesis + display	✓
	Anti-disturbance (I)	✓
	Sound level adjustment without dismantling (depending on the associated central unit)	✓
	Automatic call return if no answer	✓

CENTRAL UNITS

CENTRAL UNIT CHARACTERISTICS	Maximum number of dwellings managed	200
	Power supply recommended (not included)	12 VDC 5A - 24 VDC 2,5A
SYSTEM	Number of relays	1 (+3)

SERVICE PACKAGE CHOICE

Once you've selected your equipment, take out the package of your choice to ensure the intercom's functionality.


CLASSIC
SERVICE PACKAGE

PREPAID
15 YEARS
ALL INCLUSIVE PACKAGE

See pages XX and XX TO DISCOVER THE OFFERS

4G-IP MODULE CHARACTERISTICS	4G-IP module	Deported
	Number of intercom(s) per 4G-IP module (video)	1 to 3 (depending on the type of central unit)

SIMPLIFIED SCHEME* and WIRING

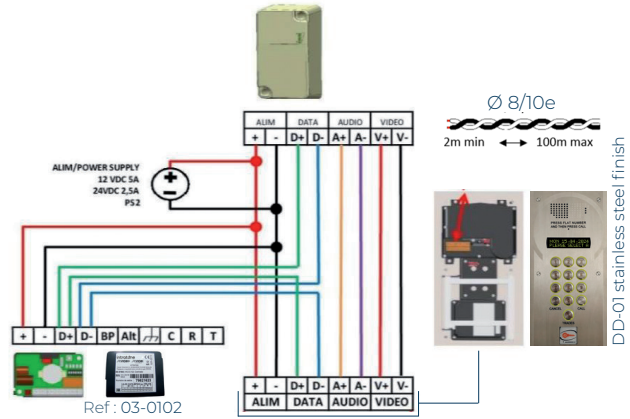

	1 door - 03-0102	2 doors - 03-0101
4G-IP module Central unit	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Central unit Intercom	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Intercom 4G-IP module	4 wires (2 twisted pairs)	2 wires (1 twisted pair)

* 1-door central unit scheme.

(I) System to prevent residents being disturbed by repeated calls

➔ MORE INFORMATION ON CENTRAL UNITS ? See pages XX and XX

SCROLLING INTERCOM